



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(51) International Patent Classification ⁷ : H04N 3/15, 7/26		A1	(11) International Publication Number: WO 00/70865
			(43) International Publication Date: 23 November 2000 (23.11.00)
(21) International Application Number: PCT/IL00/00272 (22) International Filing Date: 12 May 2000 (12.05.00) (30) Priority Data: 60/133,941 13 May 1999 (13.05.99) US (71) Applicant (for all designated States except US): BEN-GURION UNIVERSITY OF THE NEGEV (IL/IL); Research & Development Authority, P.O. Box 653, 84105 Beer-sheva (IL). (72) Inventor; and (75) Inventor/Applicant (for US only): YADID-PECHT, Only [IL/IL]; 44 Freud Street, 34753 Haifa (IL). (74) Agents: LUZZATTO, Kfir et al.; Luzzatto & Luzzatto, P.O. Box 5352, 84152 Beer-sheva (IL).		(81) Designated States: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	

Jc825 U.S. PTO
 10/053130
 11/13/01

(54) Title: A METHOD AND APPARATUS FOR PROVIDING ADAPTIVE MULTIPLE RESOLUTION TO OPTICAL IMAGERS

(57) Abstract

Method and apparatus for image compression while maintaining high resolution in selected areas within the image. An acquired image is represented by a two dimensional array of $M \times N$ pixels. The array is divided into blocks. Data related to the division of the array into blocks is stored and a threshold level of pixel attribute value is determined. The average attribute value of each block is calculated and stored. The average attribute value of each block is compared to the average attribute value of its adjacent blocks. Whenever the difference between two adjacent compared blocks is greater than the threshold level and as long as the block size is larger than one pixel, the adjacent compared blocks are divided into sub-blocks, each of which containing $A/2 \times B/2$ pixels and data related to the division of the adjacent compared blocks into sub-blocks is stored.

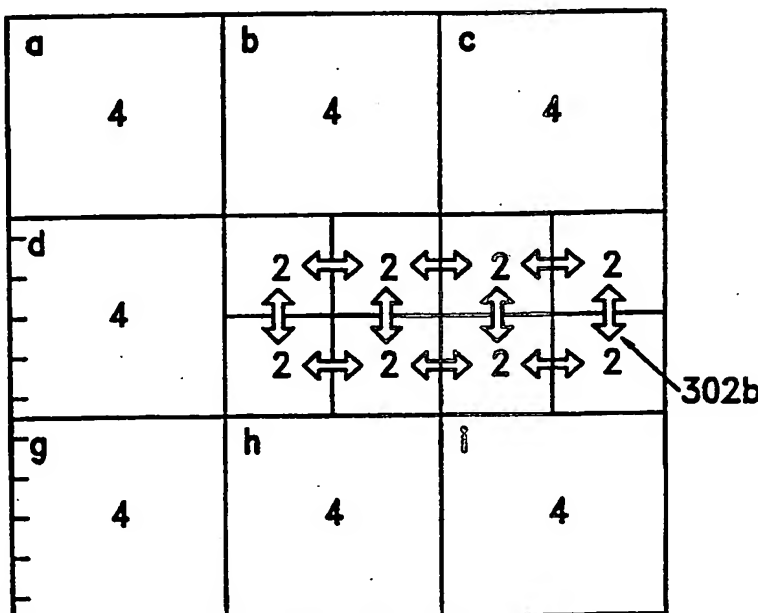

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

A METHOD AND APPARATUS FOR PROVIDING ADAPTIVE MULTIPLE RESOLUTION OF OPTICAL IMAGERS

Field of the Invention

The present invention relates to the field of optical imagers. More particularly, the invention relates to a method and apparatus for providing on-chip, adaptive multiple resolution for an electro-optical active pixel sensor in real-time.

Background of the Invention

Image coding is a widespread technology for transferring pictures/images over communication channels. Coding of an image in a certain way can be achieved by image compression techniques. When a compressed image is transmitted, a valuable transmission time can be saved, as well as memory resources. A conventional image that can be transmitted consists of an array (a matrix) of $N \times M$ pixels, wherein each pixel has a unique value that varies according to the content of the image. For example, if the image has a digital representation in a conventional gray scale, each pixel can have numerical values from 0 (black) to 255 (white).

The main problem of image compression is the degradation in resolution. If the whole image is uniformly compressed, areas that contain less information (less intensity changes between pixels, such as a uniform area) are represented by similar data that is required to represent dense areas that contain more information (greater intensity changes between pixels). Thus, more (and un-necessary) data should be stored and transmitted.

"Programmable multiresolution CMOS active pixel sensor" to R. Panicacci, S. Kemeny, L. Matthies, B. Pain and E. R. Fossum, Proc. SPIE vol.2654

Solid State Sensor Array and CCD Cameras, pp. 72-81, 1996, discloses a CMOS Active Pixel Sensor (APS) that allows the flexibility of placing signal processing circuitry on the imaging focal plane. This APS allows x-y addressability of the array for windows of interest and sparse sampling readout of the array. This multiresolution CMOS APS can perform block (a group of selected pixels) averaging, carried out on-chip, in order to eliminate intensive software processing of the image, which is carried out off-chip. However, the obtained average value is based on full resolution.

"Space-variant non-orthogonal structure CMOS image sensor design", to Pardo, F., B. Dierickx, and D. Scheffer, IEEE Journal of solid state circuits, vol. 33, no. 6, June 1998 discloses a polar imager, in which the resolution is highest in the central area of the sensor array and decreases towards the peripheral areas (e.g., a CMOS log-polar image sensor). However, using such a polar imager requires external control circuitry to focus the camera on the object of interest.

"Pixel parallel and column parallel architectures and their implementations of on sensor image compression" of Aizawa K., Hamamoto T., Ohtsuka Y., Hartori M. and Abe M. discloses an image compression technique that uses pixel parallel and column parallel architectures. However, in order to achieve the desired compression, an additional full frame analog memory is required.

"A CMOS image sensor with analog two-dimensional DCT-based compression circuits for One-Chip cameras" of Kawahito, S., M. Yoshida, M. Sasaki, K. Umehara, D. Miyazaki, Y. Tadokoro, K. Murata, S. Doushou, A. Matsuzawa, IEEE Journal of solid state circuits, vol. 32, no. 12, December 1997 discloses a CMOS image sensor with analog two-dimensional DCT-based compression circuits for One-Chip cameras.

Still, the disclosed image compression is carried out using conventional techniques, in which the resolution parameter is constant for the entire image, resulting in relatively lower quality.

All the methods described above have not yet provided satisfactory solutions to the problem of on-chip image compression that is carried out in real-time and in a compact way, while obtaining a high quality image.

It is an object of the present invention to provide a method and apparatus for image compression of a high quality picture.

It is another object of the present invention to provide a method and apparatus for image compression that provide enhanced on-chip coding of an image.

It is still another object of the present invention to provide a method and apparatus for image compression that provide adaptive coding of an image, which can be carried out in real-time.

Other objects and advantages of the invention will become apparent as the description proceeds.

Summary of the Invention

The present invention is directed to a method for image compression while maintaining high resolution in selected areas within the image. An acquired image is represented by a two dimensional array of $M \times N$ pixels. The array is divided into blocks of identical rectangular areas, each of which containing $A \times B$ pixels wherein $A < M, N$ and $B < M, N$ and $M = m \cdot A$ ($m = 2, 3, \dots$); $N = n \cdot B$ ($n = 2, 3, \dots$). Data related to the division of the array into blocks is stored and a threshold level for the pixel attribute value is

- 4 -

determined. The average attribute value of each block is calculated and stored. The average attribute value of each block is compared to the average attribute value of its adjacent blocks. Whenever the difference between two adjacent compared blocks is greater than the threshold level and as long as the block size is larger than one pixel, the adjacent compared blocks are divided into sub-blocks, each of which containing $A/2 \times B/2$ pixels and data related to the division of the adjacent compared blocks into sub-blocks is stored. The average attribute value of each sub-block is calculated and the stored average attribute value of each sub-block is compared to the stored average attribute value of its adjacent sub-blocks. Whenever the difference between two adjacent compared blocks or sub-blocks is lower than, or equal to, the threshold level, the blocks or sub-blocks are represented by representative pixels with identical attribute level which are equal to the average attribute value of the pixels that correspond to the compared block or sub-block, thereby compressing the image.

The attribute value may be the pixel's intensity and/or any pixel's attribute that can be represented by an analog value. Preferably, the stored average attribute value is an analog value and the stored data related to the division of the array into blocks and/or into sub-blocks is a digital value. Preferably, the stored data related to the division of the array into blocks and/or into sub-blocks comprises indications that correspond to location of the blocks or sub-blocks in the two-dimensional array.

Preferably, the compressed image is coded by the representative pixels and the stored data related to the division of the array into blocks and/or sub-blocks, prior to the transmission of the compressed image. Image

- 5 -

compression may be obtained in real-time by performing the following steps:

- a) reading a group of rows from the two-dimensional array, which corresponds to a block dimension;
- b) concurrently or parallelly, compressing the portion of the image that corresponds to the group of rows and reading the next group of rows from the two-dimensional array, which corresponds to the dimension of another block;
- c) repeating steps a) and b) above until all the rows of the two-dimensional array are read.

The present invention is also directed to an apparatus for image compression while maintaining high resolution in selected areas within an image. The apparatus comprises:

- a) a two-dimensional array of $M \times N$ pixels;
- b) a data storage bank for storing a group of pixels from the array;
- c) circuitry for averaging the attributes for the group of pixels;
- d) a set of one or more comparators for comparing the difference between the average attribute value of the group of pixels and the average attribute value of another group of pixels, to a predetermined threshold value;
- e) circuitry for storing pixels that represent one or more adjacent groups of pixels, for which the difference is not greater than the average attribute value; and
- f) control circuitry for controlling data transfer between the two dimensional array and the data storage bank, for controlling the operations of the averaging circuitry, for controlling the operations of the set of one or more comparators and for controlling data transfer into the storage circuitry.

The data storage bank may be a capacitor bank. Preferably, the apparatus comprises circuitry for storing one or more analog values and/or circuitry for storing one or more digital values. The apparatus may further comprise circuitry for storing data related to the division of the array into blocks and/or into sub-blocks, and/or indications that corresponds to location of the blocks or sub-blocks in the two-dimensional array.

The apparatus may further comprise circuitry for coding the compressed image by the representative pixels and the stored data related to the division of the array into blocks and/or sub-blocks, prior to the transmission of the compressed image and a further circuitry for transmitting the coded compressed image.

Brief Description of the Drawings

The above and other characteristics and advantages of the invention will be better understood through the following illustrative and non-limitative detailed description of preferred embodiments thereof, with reference to the appended drawings, wherein:

Fig. 1A (prior art) is a block diagram of a programmable multi-resolution CMOS APS architecture;

Fig. 1B (prior art) is an example of a column configuration for 3x3 block averaging;

Fig. 2 (prior art) is an example of the output of a multi-resolution sensor;

Figs. 3A and 3B schematically illustrate a block compression of an image with adaptive multiple resolution, according to a preferred embodiment of the invention; and

Fig. 4 is block diagram of an apparatus for providing compression of an image with adaptive multiple resolution, according to a preferred embodiment of the invention.

Detailed Description of Preferred Embodiments

Fig. 1A is a block diagram of a programmable multi-resolution CMOS APS architecture, according to prior art. The CMOS APS 100a comprises a CMOS APS sensor 101 consisting of 128x128 photo-gate array. The imager (APS) is organized in a matrix form where the pixels are addressed by row and column addresses like the organization of a memory device, for providing random access to the sensor pixels. The APS is programmable, in order to allow readout of any size of nxn block of pixel or kernel. Each kernel value (i.e., intensity level) represents the average of all the pixel values in this region. The row select logic circuitry 102 selects a row of pixels for readout, wherein each pixel is controlled by the Row Average circuit 104. The Column Average Circuit 103 calculates the average value of the row pixel data, which has been select by the Row Select Logic circuitry 102. The Column Select Logic 105 controls which columns containing the processed data are readout. The command shift register(s) 106 controls the way that columns contain stored data for readout and where the average stored data is stored for subsequent processing. In addition, by averaging block regions of the array and reading out this average, data reduction is achieved without aliasing effects. Averaging is carried out in the column readout circuitry so that the average value is based on a full resolution image.

Fig. 1B (prior art) is an example of column configuration for 3x3 block averaging, according to prior art. The block averaging circuitry 100b comprises a matrix 111, which represents the image. Each cell (square) 115 in the matrix represents a single pixel with different value. The pixel values in a single row are sampled onto the column average circuitry 112 through every three switches 116. For every group of pixels 117 in row j, the average value is calculated and mapped into a cell 120. The row

average circuitry 113 samples the average value of the three pixels from the column average circuitry 112 and then the next row is sampled into the column average circuitry 112. The row average circuitry 113 samples the average of the new three pixels. This process is repeated, until all three rows are processed and three samples are collected in the row average circuitry 113. After the three samples of the rows have been collected in the row average circuitry 113, their average value is calculated and mapped into a cell 118. As a result of this process, the average value 119 of the 3x3 block is stored in the row average circuitry 113. This process is repeated until the entire image is completely scanned. The multiplexer 114 sends out the coded image from the row average circuitry.

Figs. 2A to 2D illustrates an example output of the multi-resolution sensor, according to prior art. An on-chip column circuitry performs block averaging by using programmable kernel sizes. In this example, the image of George Washington from a US one dollar bill illustrates the multi-resolution capability. The output of a programmable multi-resolution sensor is shown for images with full resolution in Fig. 2A. The outputs of a programmable multi-resolution sensor are shown for images with compressed resolutions of 2x2, 4x4 and 8x8 in Figs. 2B, 2C and 2D, respectively.

According to a preferred embodiment of the invention, the image is divided to blocks, starting with large number of pixels in each block of the image. For example, each block contains 8x8 pixels of the image. The block value is represented by the average value of the pixels in the block. The subsequent stage is to compare this value with the neighboring blocks. If the difference between two adjacent blocks is smaller than a predetermined threshold, the resolution in this location remains the same (i.e., the average value of the pixels in each block). If the difference

exceeds, or is greater than, the threshold value, then the resolution is increased by further dividing each block to sub-blocks and repeating the procedure for adjacent sub-blocks. The procedure is repeated until the difference between neighboring blocks/sub-blocks is smaller than the threshold value, or if the highest resolution is reached.

Figs. 3A and 3B schematically illustrate a block compression of an image with adaptive multiple resolution, according to a preferred embodiment of the invention. Fig. 3A illustrates a 48×48 array 300 of pixels representing an image, which is divided into nine blocks (a, b, c, d, e, f, g, h, i) of 4×4 pixels per each block. For two neighboring blocks e and f that are currently described in resolution of 4×4 and differ in their values by more than the threshold value, the resolution at that block is increased to 2×2 as described in Fig. 3B with respect to blocks e and f. The bi-directional arrows 302a and 302b in Figs. 3A and 3B, respectively, show the comparison operation between two neighboring blocks.

Fig. 4 is a block diagram of an apparatus for providing compression of an image with adaptive multiple resolution, according to a preferred embodiment of the invention. The apparatus (a chip in this example) 400 comprises an APS array 401 which contains an $N \times N$ pixel array (as described in Fig. 1A hereinabove). In order to change the resolution in a block it is required to compare its average value with the average value of its neighboring blocks. The minimal resolution in this example is $A \times A$ pixels, and therefore the capacitor bank 402 stores the data that corresponds to A rows that are intended to be encoded and their neighboring rows, consisting of additional A rows below the coded area and A rows above the coded area. The stored data consists of an analog voltage level, which is achieved by using capacitors for data storage. The capacitor bank 402 contains $3 \times A$ rows of capacitors. The row decoder 408 selects the

row that is read and input to the capacitor bank 402, described hereinabove. The column decoder 411 selects the column is read and input to the capacitor bank 402. The averaging block 403 calculates the average values of the block's data that is stored in the capacitor bank 402, according to the required block size. The control logic 410 is charged with the data arriving to each of the process block. The control logic 410 selects the row that is read and input to the average block 403 by ordering it to the capacitor row decoder 409 and also operates the sets of programmable switches that are used to perform signal averaging. The analog memory block 404 stores the information related to the value of the coded block. The size of the block and its current location in the image are stored in a digital memory. The control logic 410 selects the blocks that will enter the comparators block 405. The comparators block 405 selects a difference value between two neighboring blocks values, compares it with a threshold and outputs a control signal. The control signals carry the information required for deciding whether to change (to increase) the resolution at that location, or not. The coding block 406 stores the coded data. The sending block 407 uses the combination of the analog memory block 404 and the coding block 406 that contains digital data in order to output a coded image. This combination consists of analog data, i.e. pixels value and digital data, i.e. block size and block location in the image. The digital data is varied according to changes in the block size and in the block location.

According to a preferred embodiment of the invention, the acquired (un-coded) image may be output through a separate output. The column decoder 411, the capacitors 412 and the image output 413 describe a prior art of a regular APS output. The use of regular (not coded) APS image may be required for control and comparison requirements with the coded image. The column decoder 411 samples the data that should be read, into

the capacitors 412, and from the capacitors 412 the data is output as in a conventional image output 413.

On-chip adaptive multiple resolution is obtained by dividing the acquired image into blocks for low-resolution representation. The resolution is iteratively varied in areas of the image where the difference between the blocks is above a predetermined threshold value. Each block in the image is output according to its difference from its neighbors. For example, if the average gray level of a block is greater than the average value of an adjacent block by more than a predetermined threshold value, then the resolution in the block at that location is increased.

According to a preferred embodiment of the invention, the system operates in a real-time mode. In this mode, the system starts to code a portion of the image, which corresponds to read rows, while the APS continues to receive image information (pixel values) that corresponds to remaining (un-read) portions. The real-time coding is carried out according to the selected block length. The capacitor bank comprises $3 \times A$ rows. Once the middle A rows are completely coded, additional A rows may be loaded into the capacitor bank.

The above examples and description have of course been provided only for the purpose of illustration, and are not intended to limit the invention in any way. As will be appreciated by the skilled person, the invention can be carried out in a great variety of ways, employing more than one technique from those described above, all without exceeding the scope of the invention.

CLAIMS

1. A method for image compression while maintaining high resolution in selected areas within said image, comprising:

a) representing an acquired image by a two dimensional array of $M \times N$ pixels;

b) dividing said array into blocks of identical rectangular areas, each of said blocks containing $A \times B$ pixels wherein $A < M, N$ and $B < M, N$ and $M = m \times A$ ($m = 2, 3, \dots$); $N = n \times B$ ($n = 2, 3, \dots$);

c) storing data related to the division of said array into blocks;

e) determining a threshold level for the pixel attribute value;

f) calculating the average attribute value of each block and storing said average attribute value;

g) comparing the average attribute value of each block to the average attribute value of its adjacent blocks;

h) whenever the difference between two adjacent compared blocks is greater than said threshold level and as long as the block size is larger than one pixel, performing the following steps:

h.1) dividing said adjacent compared blocks into sub-blocks; each of which containing $A/2 \times B/2$ pixels and storing data related to the division of said adjacent compared blocks into sub-blocks;

h.2) calculating the average attribute value of each sub-block;

h.3) comparing the stored average attribute value of each sub-block to the stored average attribute value of its adjacent sub-blocks; and

i) whenever the difference between two adjacent compared blocks or sub-blocks is lower than, or equal to, said threshold level, representing said blocks or sub-blocks by representative pixels with identical attributes level which is equal to the average attribute value of the pixels that correspond to said compared block or sub-block, thereby compressing said image.

2. A method according to claim 1, wherein the attribute value is the pixel's intensity and/or any pixel's attribute that can be represented by an analog value.

3. A method according to claim 1, wherein the stored average attribute value is an analog value.

4. A method according to claim 1, wherein the stored data related to the division of said array into blocks and/or into sub-blocks is a digital value.

5. A method according to claim 1 or 4, wherein the stored data related to the division of said array into blocks and/or into sub-blocks comprises indications that corresponds to location of said blocks or sub-blocks in the two-dimensional array.

6. A method according to claim 1, further comprising coding the compressed image by the representative pixels and the stored data related to the division of the array into blocks and/or sub-blocks, prior to the transmission of said compressed image.

7. A method according to claim 1, wherein the image compression is carried out in real-time by performing the following steps:

- d) reading a group of rows from the two-dimensional array, which corresponds to a block dimension;
- e) concurrently or parallelly, compressing the portion of said image that corresponds to said group of rows and reading the next group of rows from the two-dimensional array, which corresponds to the dimension of another block;

- 14 -

f) repeating steps a) and b) above until all the rows of said two-dimensional array are read.

8. Apparatus for image compression while maintaining high resolution in selected areas within an image, comprising:

- a) a two-dimensional array of $M \times N$ pixels;
- b) a data storage bank for storing a group of pixels from said array;
- c) circuitry for averaging the attributes for said group of pixels;
- d) a set of one or more comparators for comparing the difference between the average attribute value of said group of pixels and the average attribute value of another group of pixels, to a predetermined threshold value;
- e) circuitry for storing pixels that represent one or more adjacent groups of pixels, for which said difference is not greater than said average attribute value; and
- f) control circuitry for controlling data transfer between said two dimensional array and the said data storage bank, for controlling the operations of said averaging circuitry, for controlling the operations of said set of one or more comparators and for controlling data transfer into said storage circuitry.

9. Apparatus according to claim 8, wherein the data storage bank is a capacitor bank.

10. Apparatus according to claim 8, wherein the attribute value is the pixel's intensity and/or any pixel's attribute that can be represented by an analog value.

11. Apparatus according to claim 8, comprising circuitry for storing one or more analog values and/or circuitry for storing one or more digital values.

12. Apparatus according to claim 8 or 11, further comprising circuitry for storing data related to the division of said array into blocks and/or into sub-blocks, and/or indications that corresponds to location of said blocks or sub-blocks in the two-dimensional array.

13. Apparatus according to claim 8, further comprising circuitry for coding the compressed image by the representative pixels and the stored data related to the division of the array into blocks and/or sub-blocks, prior to the transmission of said compressed image.

14. Apparatus according to claim 13, further comprising circuitry for transmitting the coded compressed image.

15. A method for image compression while maintaining high resolution in selected areas within said image, substantially as described and illustrated.

16. Apparatus for image compression while maintaining high resolution in selected areas within said image, substantially as described and illustrated.

This Page Blank (uspto)

1/6

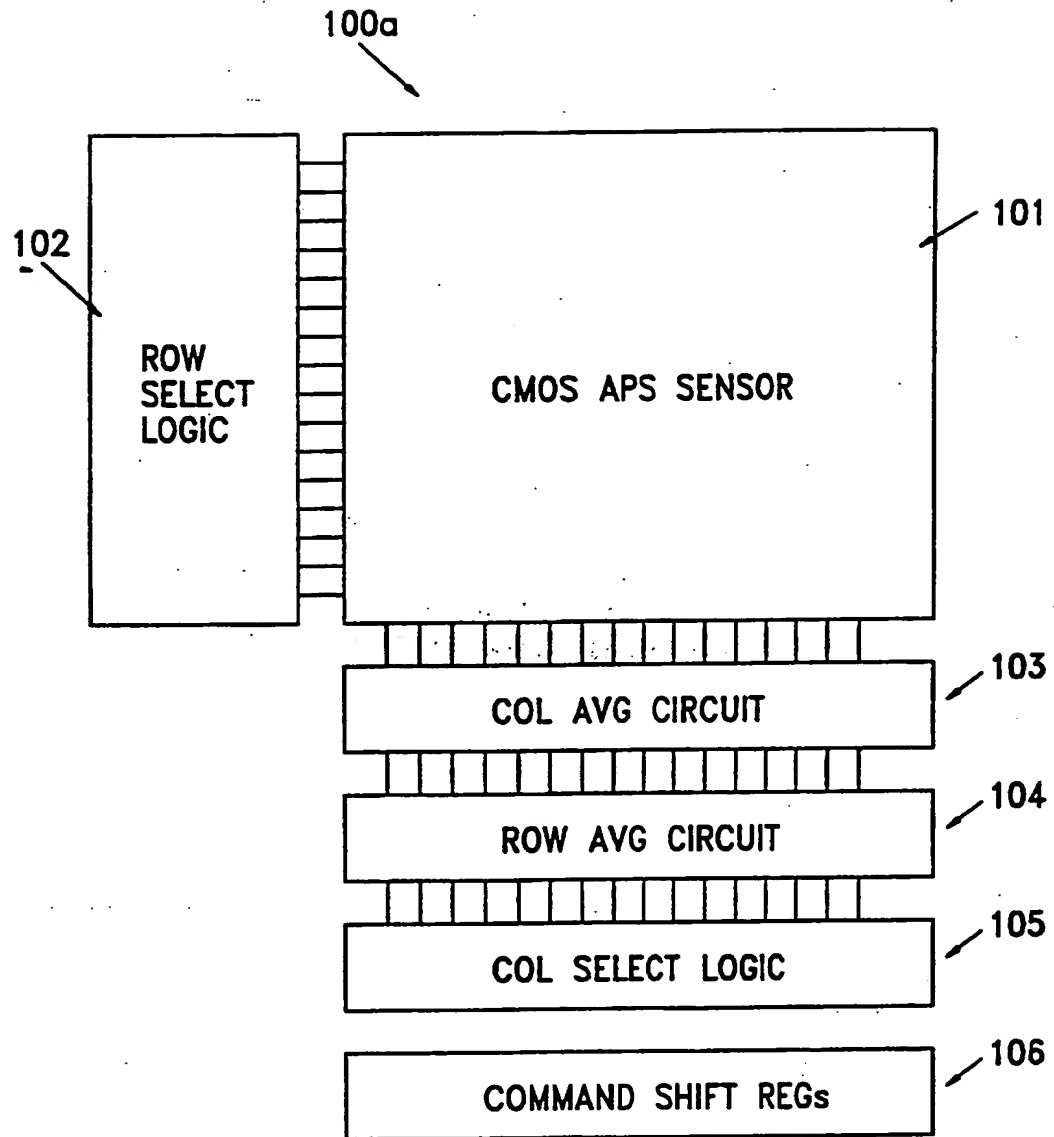


Fig. 1A

This Page Blank (uspto)

2/6

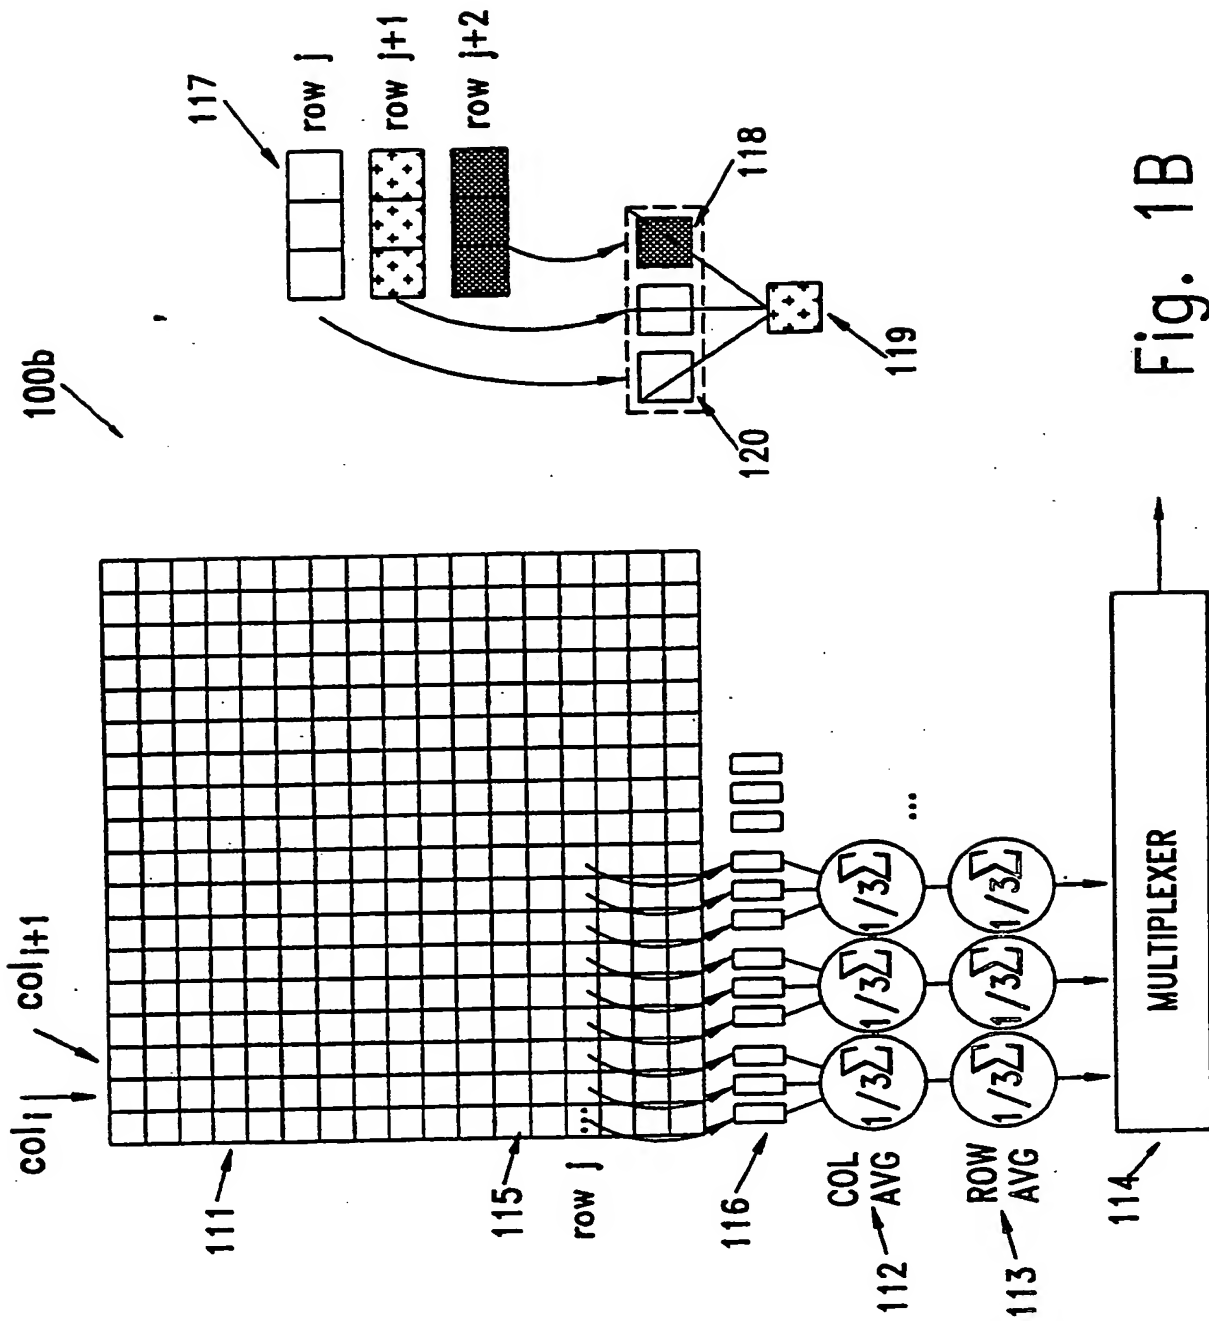


Fig. 1B

This Page Blank (uspto)

3/6

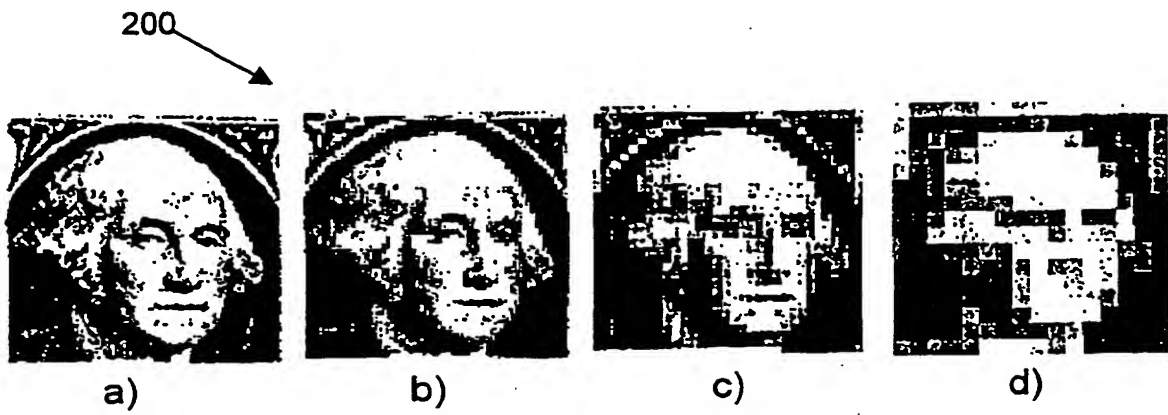


Fig. 2

This Page Blank (uspto)

4/6

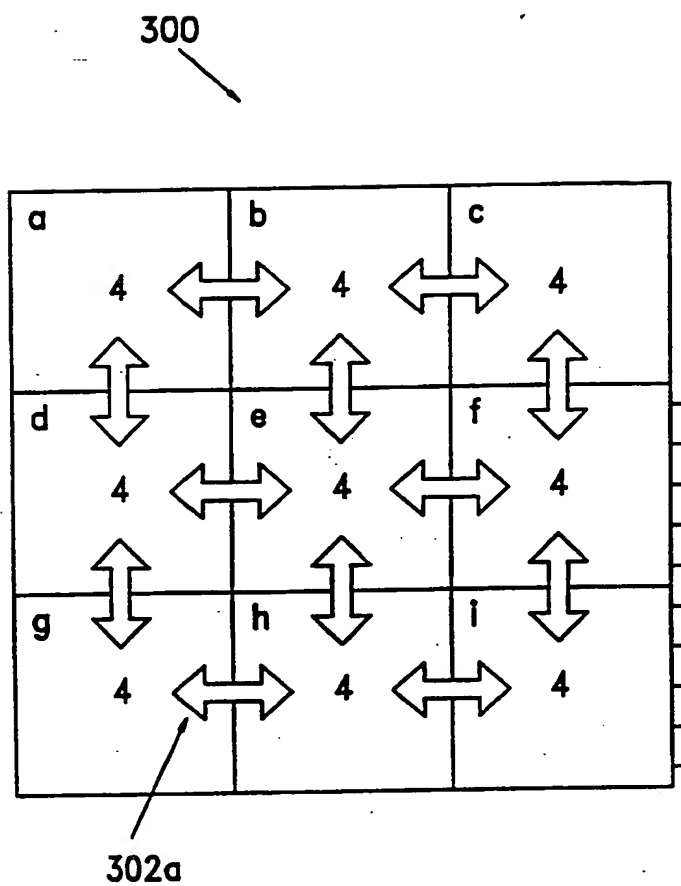


Fig. 3A

This Page Blank (uspto)

5/6

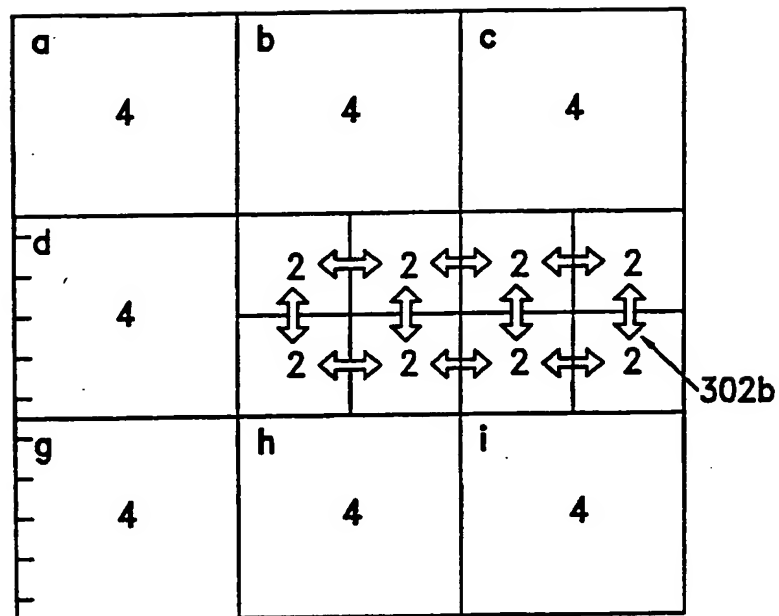


Fig. 3B

This Page Blank (uspto)

6/6

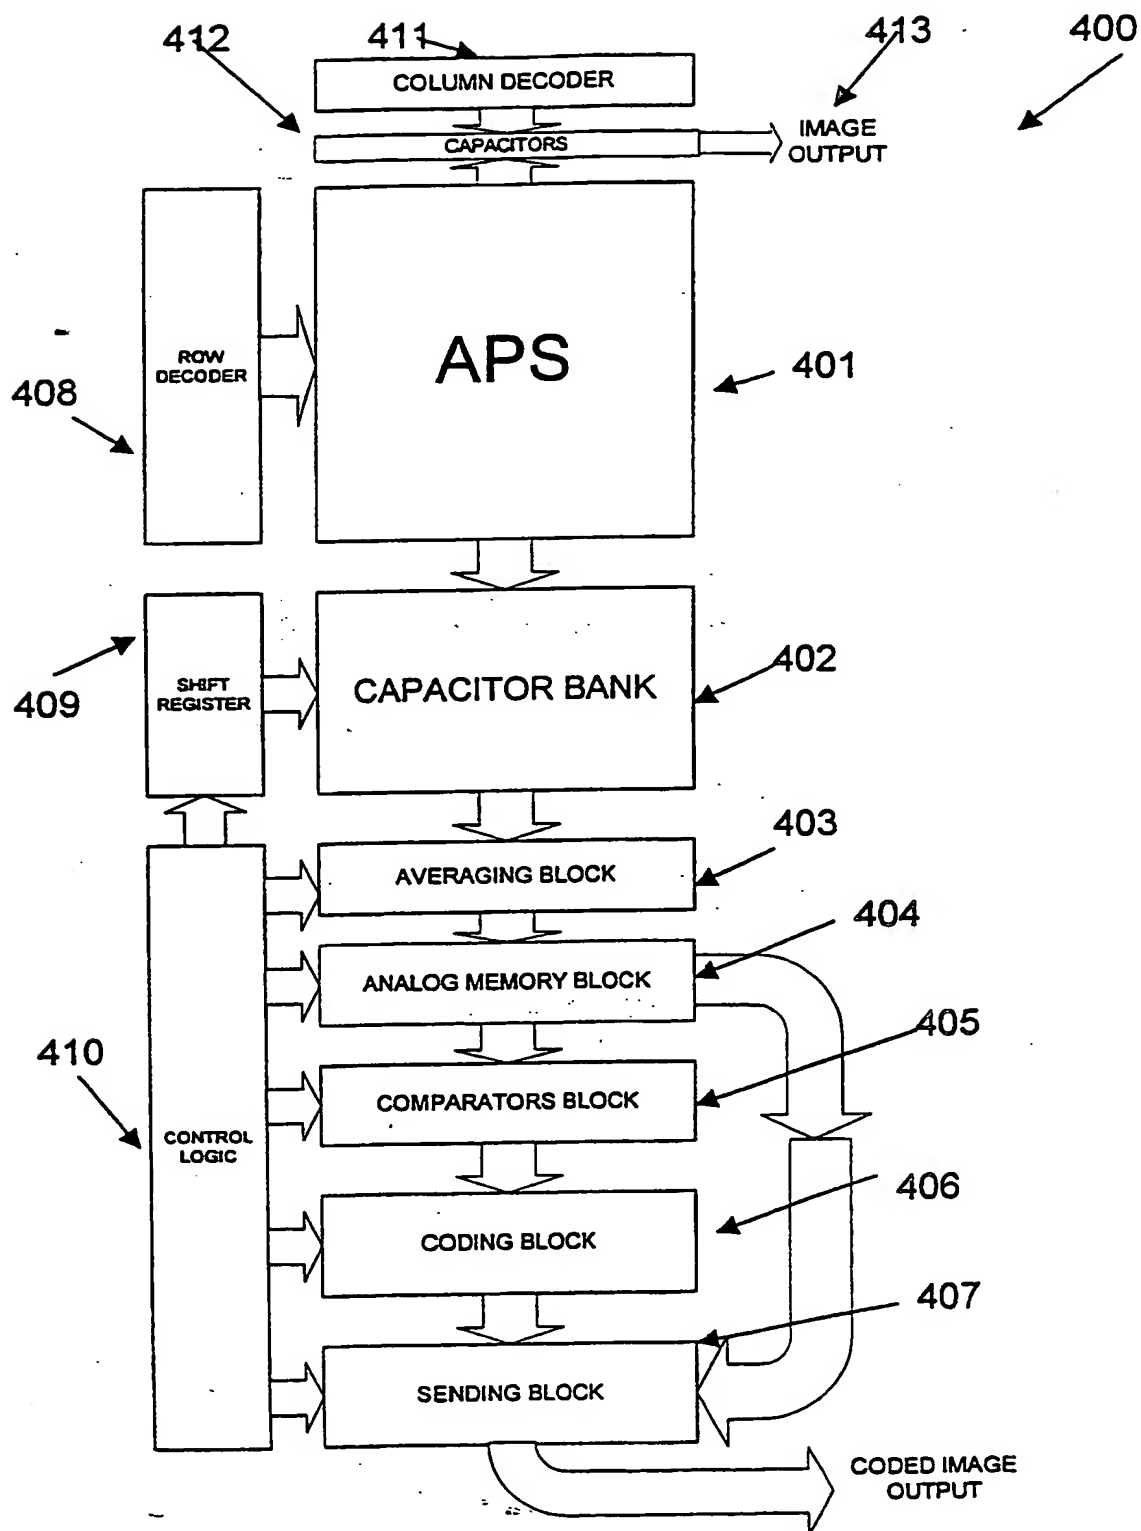


Fig. 4

SUBSTITUTE SHEET (RULE 26)

This Page Blank (uspto)

INTERNATIONAL SEARCH REPORT

Int'l Application No

PCT/IL 00/00272

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04N3/15 H04N7/26

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, INSPEC, COMPENDEX, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	KEMENY S E ET AL: "MULTIRESOLUTION IMAGE SENSOR" IEEE TRANSACTIONS ON CIRCUITS AND SYSTEMS FOR VIDEO TECHNOLOGY, US, IEEE INC. NEW YORK, vol. 7, no. 4, 1 August 1997 (1997-08-01), pages 575-582, XP000694611 ISSN: 1051-8215 cited in the application page I figures 1-3 — -/-	1-16



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

*** Special categories of cited documents :**

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

13 September 2000

Date of mailing of the international search report

10/10/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Berbain, F

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>STROBACH P: "QUADTREE-STRUCTURED INTERFRAME CODING OF HDTV SEQUENCES" VISUAL COMMUNICATIONS AND IMAGE PROCESSING '88 9-11 NOVEMBER 1988, CAMBRIDGE, MA,US,BELLINGHAM, WA, vol. 1001, 1988, pages 812-819, XP000472722 paragraphs '00II!', '0III! figures 1,2</p>	1-16
A	<p>DICKINSON A ET AL: "TP 13.5: A 256X256 CMOS ACTIVE PIXEL IMAGE SENSOR WITH MOTION DETECTION" IEEE INTERNATIONAL SOLID STATE CIRCUITS CONFERENCE,US,IEEE INC. NEW YORK, vol. 38, 1 February 1995 (1995-02-01), pages 226-227, XP000557622 ISSN: 0193-6530 the whole document</p>	1-16
A	<p>XIA S ET AL: "An all CMOS foveal image sensor chip" PROCEEDINGS ELEVENTH ANNUAL IEEE INTERNATIONAL ASIC CONFERENCE (CAT. NO.98TH8372), PROCEEDINGS ELEVENTH ANNUAL IEEE INTERNATIONAL ASIC CONFERENCE, ROCHESTER, NY, USA, 13-16 SEPT. 1998, pages 409-413, XP002147265 1998, New York, NY, USA, IEEE, USA ISBN: 0-7803-4980-6 paragraph '000I!</p>	1-16
A	<p>AIZAWA K ET AL: "A NOVEL IMAGE SENSOR FOR VIDEO COMPRESSION" PROCEEDINGS OF THE INTERNATIONAL CONFERENCE ON IMAGE PROCESSING (ICIP),US,LOS ALAMITOS, IEEE COMP. SOC. PRESS, vol. CONF. 1, 13 November 1994 (1994-11-13), pages 591-595, XP000522871 ISBN: 0-8186-6952-7 paragraph '0002!</p>	1-16